


LED-LIGHTS

These high power LED- lights use up to date LED-electronics with a luminous colour of 2700 K. The special designed electronic provides a constant illumination independantly of the power supply voltage (8-30 V) and

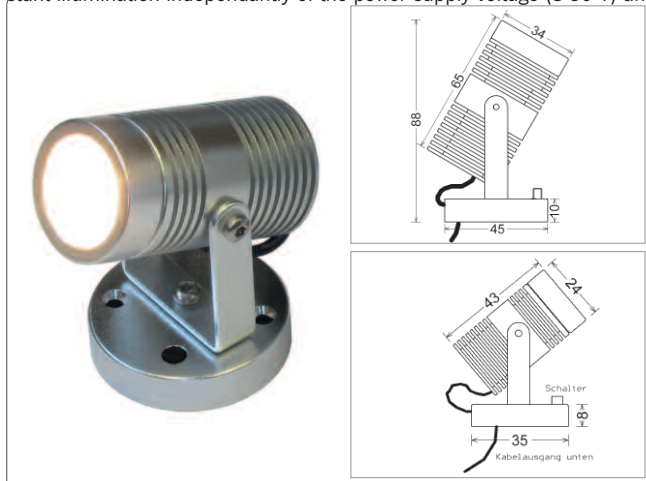

PLS 2,5 S

Order-No.: 3 5742 1510


Mini-Power LED spot 2,5W, 2axis adjustable with ON / OFF switch at the base. Luminous colour warm white 2700 K with flood characteristic. DC 8 - 30 V. Base diameter 35 mm.

PLS 7 D

Order-No.: 3 5742 1220

Power LED spot 6 W with dimmer integrated in the stand. Luminous colour warm white 2700 K with flood characteristic. DC 8 - 30 V. Base diameter 45 mm.

protects the LED from overload. The housing is made from anodized aluminium and guarantees a very efficient heat dissipation and long light lifetime of the light.

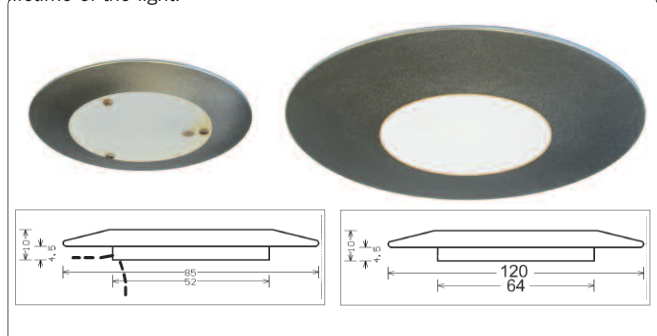

PLE 3

Order-No.: 3 5742 3500

Super flat light with integrated Power LED, 3 W. Luminous colour warm white 2700 K, DC 8 - 30 V. Aluminium housing with acrylic glass. Diameter 85 mm, height 10 mm.

PLE 3 S

Order-No.: 3 5742 3010

Super flat light with integrated Power LED, 3 W with integrated ON / OFF switch. Same technical data as PLE 3.

PLE 6

Order-No.: 3 5742 5500


Super flat light with integrated Power LED, 6 W. Luminous colour warm white 2700 K, DC 8 - 30 V. Aluminium housing with acrylic glass. Diameter 120 mm, height 10 mm.

LED-LIGHTS FOR EXTERIOR USE

The compact and lightweight LED exterior lights of the TRILLIANT® series produce a wide flood light and are designed for the use as work- / deck-light and suit well the requirements of boats and vehicles.

The robust construction from coated die cast aluminium is designed to withstand vibrations, corrosion, humidity and dust. LEDs from the newest

generation together with an up to date reflector technology produce a wide flood light. A brilliant designed thermo management guarantees a continuous light stream during the hole lifetime of the light. (> 40.000 hours).

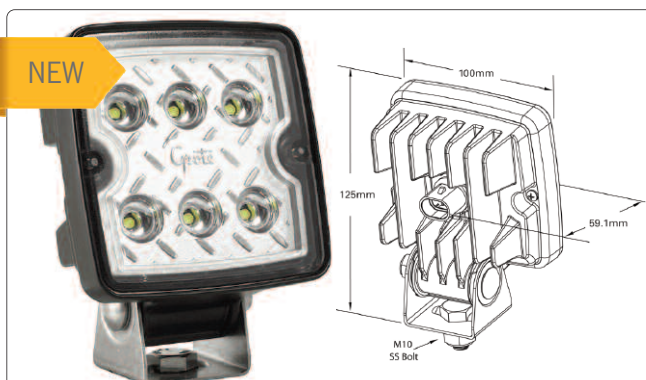

LTQ 1200 WF

Order-No.: 6 0156 3631

Wide flood spot light with square diecast aluminium housing, black coated. Hard coated polycarbonate glass. Corrosion resistant to SAE J2139. Daylight similar white light for authentical colours. Inclusive watertight DT-2- (Deutsch) connector.

Nominal voltage	DC 12 - 24V
Power consumption / luminous flux	18 W / 1200 Lumen
Protection	IP69K



LTR 26 WF

Order-No.: 6 0156 4015

Wide flood spot light with round diecast aluminium housing, black coated. Hard coated polycarbonate glass. Corrosion resistant to SAE J2139. Daylight similar white light for authentical colours. Inclusive watertight DT-2- (Deutsch) connector

Nominal voltage	DC 12 - 24 V
Power consumption / luminous flux	18 W / 1790 Lumen
Protection	IP69K