

■ **SDV 1** Order-No.: 6 3400 1102

Alignable fuse holder with cap for strip fuses STS. For easy mounting the base has 2 lashes. The terminal screws and nuts are made of nickel plated brass M10. Delivery without strip fuse

Dimensions L 118 x W 40 x H 53 mm

■ **SDV 2 (double)** Order-No.: 6 1626 0976

■ **SDV 3 (triple)** Order-No.: 6 1626 0977

■ **SDV 4 (quadruple)** Order-No.: 6 1626 0975

Rail for interconnection of more several fuse holders SHD. No SHD included! Copper, nickel-plated 25 x 3 mm



- **STS 35 A** Order-No.: 6 5701 5351
- **STS 50 A** Order-No.: 6 5701 5501
- **STS 63 A** Order-No.: 6 5701 5631
- **STS 80 A** Order-No.: 6 5701 5801
- **STS 100 A** Order-No.: 6 5701 6101
- **STS 125 A** Order-No.: 6 5701 6121
- **STS 160 A** Order-No.: 6 5701 6161
- **STS 200 A** Order-No.: 6 5701 6201
- **STS 250 A** Order-No.: 6 5701 6251
- **STS 300 A** Order-No.: 6 5701 6301
- **STS 355 A** Order-No.: 6 5701 6351
- **STS 425 A** Order-No.: 6 5701 6421
- **STS 500 A** Order-No.: 6 5701 6501

The strip fuses consist of a melting strip within a ceramic holder with window. Type B/BN. Mouth width 11 mm.

The T-fuse is preferably used to protect lithium-ion batteries with a very high short-circuit current.



■ **BS 5502100 T-Fuse holder** Order-No.: 7 0100 5502

Fuse holder for T-fuses 225 - 400A, rated voltage DC 125 V. Ignition protection acc. to ISO8846 and SAE J1171. Supplied without fuse. Dimensions L 178 x W 51 x H 57 mm, connecting bolt Ø 8 mm

■ **BS 5117 T-Fuse 225 A** Order-No.: 7 0012 5117

■ **BS 5119 T-Fuse 300 A** Order-No.: 7 0012 5119

■ **BS 5121 T-Fuse 400 A** Order-No.: 7 0012 5121

T-fuses with a interrupt capacity of 20,000 A @ 125 V.


The terminal fuse block ABH 1 is designed for an easy and space saving installation of high current bolt fuses directly on a battery or a bus bar. Maximum current of the fuse holder ABH 1 is 300A. Rated voltage 58V.



■ **BS 5196** Order-No.: 7 0010 5196

Fuse holder with cover for 3 bolt fuses SHB with common input potential for fusing loads up to 200 A per fuse and max. 300 A per fuse holder. Ignition proof according to ISO8846 and SAE J1171. Connection Ø 8 mm.

Dimensions L 190 x W 51 x H 63 mm

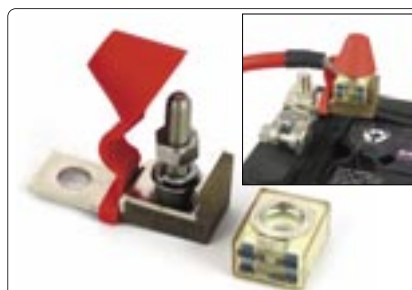

■ **ABH 1** Order-No.: 7 0012 5191

■ **ABH 2** Order-No.: 7 0012 2151

Terminal fuse block for a single bolt fuse SHB. For protection of different wire-diameters at one bolt. Delivery without bolt fuse SHB, please order separately!

Dimensions L 63 x W 21 x H 47 mm

Bolt M 8

Mounting hole 10 mm



■ **SHB 30 A** Order-No.: 6 0892 5301

■ **SHB 50 A** Order-No.: 6 0892 5501

■ **SHB 75 A** Order-No.: 6 0892 5751

■ **SHB 100 A** Order-No.: 6 0892 6101

■ **SHB 125 A** Order-No.: 6 0892 6121

■ **SHB 150 A** Order-No.: 6 0892 6151

■ **SHB 200 A** Order-No.: 6 0892 6201

■ **SHB 250 A** Order-No.: 6 0892 6251

■ **SHB 300 A** Order-No.: 6 0892 6301

Fuses for M 8 - bolt. Rated voltage DC 58 V