

Terminal Blocks


Fully insulated independent terminal blocks to isolate circuits

- Each screw pair is one isolated circuit
- Terminal Block Jumpers allow creation of common circuits
- Closed back design insulates power from the mounting surface

Bus Material	Nickel-Plated Brass
Base Material	High temp UL 94 VO thermoplastics
Regulatory	RoHS and UL Recognized, CE certified




2406

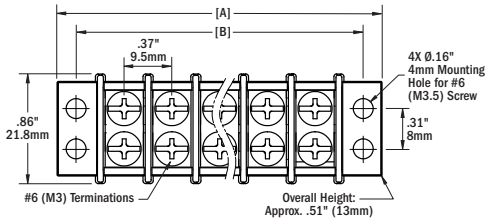

2402-2410




2506

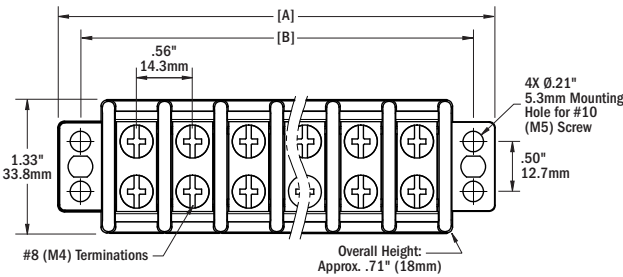

2502-2512



2606

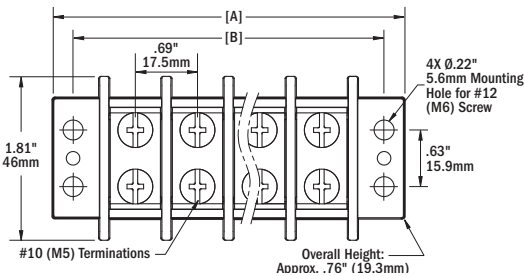

2602-2610

Part #	Circuits	AC/DC Amps	AC/DC Volts	Terminal Screw	[A] Length in (mm)	[B] Mounting Centers in (mm)
2402	2	20A	300V	M3.5 (#6)	1.43 (36.20)	1.13 (28.70)
2404	4	20A	300V	M3.5 (#6)	2.17 (55.00)	1.87 (47.60)
2406	6	20A	300V	M3.5 (#6)	2.91 (74.00)	2.62 (66.60)
2408	8	20A	300V	M3.5 (#6)	3.66 (93.00)	3.37 (85.60)
2410	10	20A	300V	M3.5 (#6)	4.41 (112.00)	4.12 (104.60)
2502	2	30A	600V	M4 (#8)	2.13 (54.00)	1.69 (42.80)
2504	4	30A	600V	M4 (#8)	3.25 (82.60)	2.81 (71.40)
2506	6	30A	600V	M4 (#8)	4.38 (111.20)	3.94 (100.00)
2508	8	30A	600V	M4 (#8)	5.50 (139.70)	5.06 (128.50)
2510	10	30A	600V	M4 (#8)	6.63 (168.30)	6.18 (157.10)
2512	12	30A	600V	M4 (#8)	7.75 (196.80)	7.31 (185.60)
2602	2	65A	600V	M5 (#10)	2.51 (63.80)	2.06 (52.40)
2604	4	65A	600V	M5 (#10)	3.89 (98.70)	3.44 (87.30)
2606	6	65A	600V	M5 (#10)	5.26 (133.60)	4.81 (122.20)
2608	8	65A	600V	M5 (#10)	6.63 (168.50)	6.19 (157.10)
2610	10	65A	600V	M5 (#10)	8.01 (203.40)	7.56 (192.00)

Terminal Block Jumpers

Combines independent circuits on Terminal Blocks (above) and ST-Blade Fuse Blocks 5035 and 5037

Bus Material	Nickel-Plated Brass
Continuous Amperage	Equivalent to matching block

Part #	Description	Retail Pack
9218	For use with 20A Terminal Blocks	5
9217	For use with 30A Terminal Blocks and ST-Blade Fuse Blocks 5035 & 5037	5
9216	For use with 65A Terminal Blocks	5

Related Product



ST-Blade Fuse Blocks p. 66



9218

9217

9216

TECH tip™

Connector & Insulators Explained

Tin-plated copper buses provide maximum conductivity and corrosion resistance.

Insert-molded stainless steel studs eliminate the need for securing nuts and allow high torquing for excellent electrical contact.

UL 94-V0 rated UL 94-V0 rated base materials have flame retardants and will self extinguish if a flame source is removed.

Terminal Screws incorporate stainless steel split ring lock washers and captive star-type lock washers keep connections tight in high vibration environments.

One-Piece Serrated Flange Nuts ensure correct and secure connections which do not cause resistance.

Insulating covers meet ABYC and USCG insulation requirements.